



**UCUBE-20 DATASHEET**

**Very Powerful UV LED curing floodlight**

**Full UV LED range available: UVC, UVB and UVA**

**Long lifetime & few maintenances thanks to LED technology**

**Easy-to-use with a PLC thanks to integrated smart electronics.**




<b>Electronics</b>	Power supply	48 VDC $\pm$ 10% (maximal power consumption: 400W)
	Connector	SUBD13W3 – 13pins for power and signals
	Illumination mode	Continuous with a direct DIM signal [0-10V]
<b>Optics</b>	Wavelength	UVC: 255, 265, 275 nm UVB: 295, 305, 325, 340 nm UVA: 365, 385, 395, 405 nm VIS: 450, 465 nm (Blue), 525 nm (Green), 625 nm (Red), Other on request.
	Irradiance	Up to 2000 mW/cm <sup>2</sup> in the UVA range Up to 100 mW/cm <sup>2</sup> in UVC & UVB range
<b>Mechanics</b>	Width x Height x Length	224mm x 224mm x 183mm
	Weight	6,0 kg
	Material	Device body: Aluminum alloy
	IP rating	IP4X
<b>Environment</b>	Operation	Temperature: 10°C to 35°C – Humidity: 20% to 80% humidity (with no condensation) – Altitude: Up to 2000m
	Regulations & Marking	CE - UKCA - FCC - ICES-3/NMB-3
	Environmental standards	RoHS III Directives - REACH Regulation - WEEE Regulation




Product reference

**MONO** wavelength version:

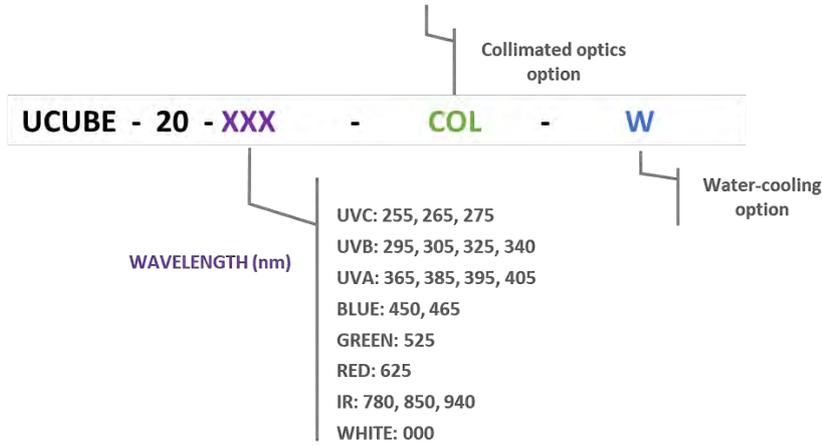


**DUAL** wavelength version:

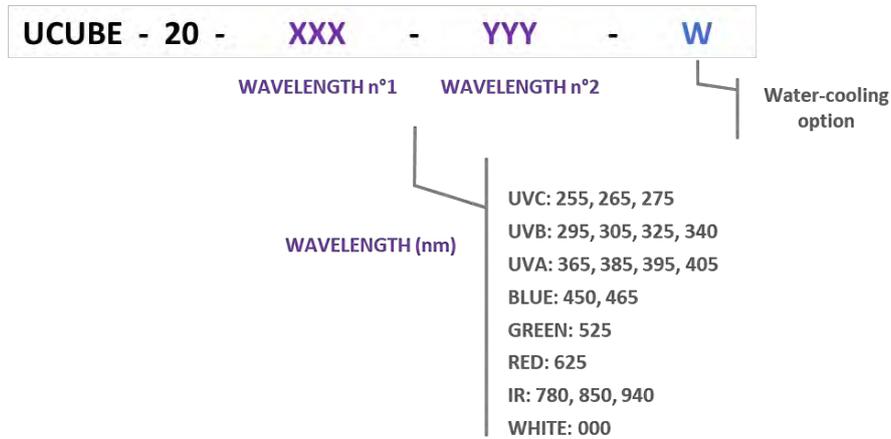



Optical characteristics

LED spectra

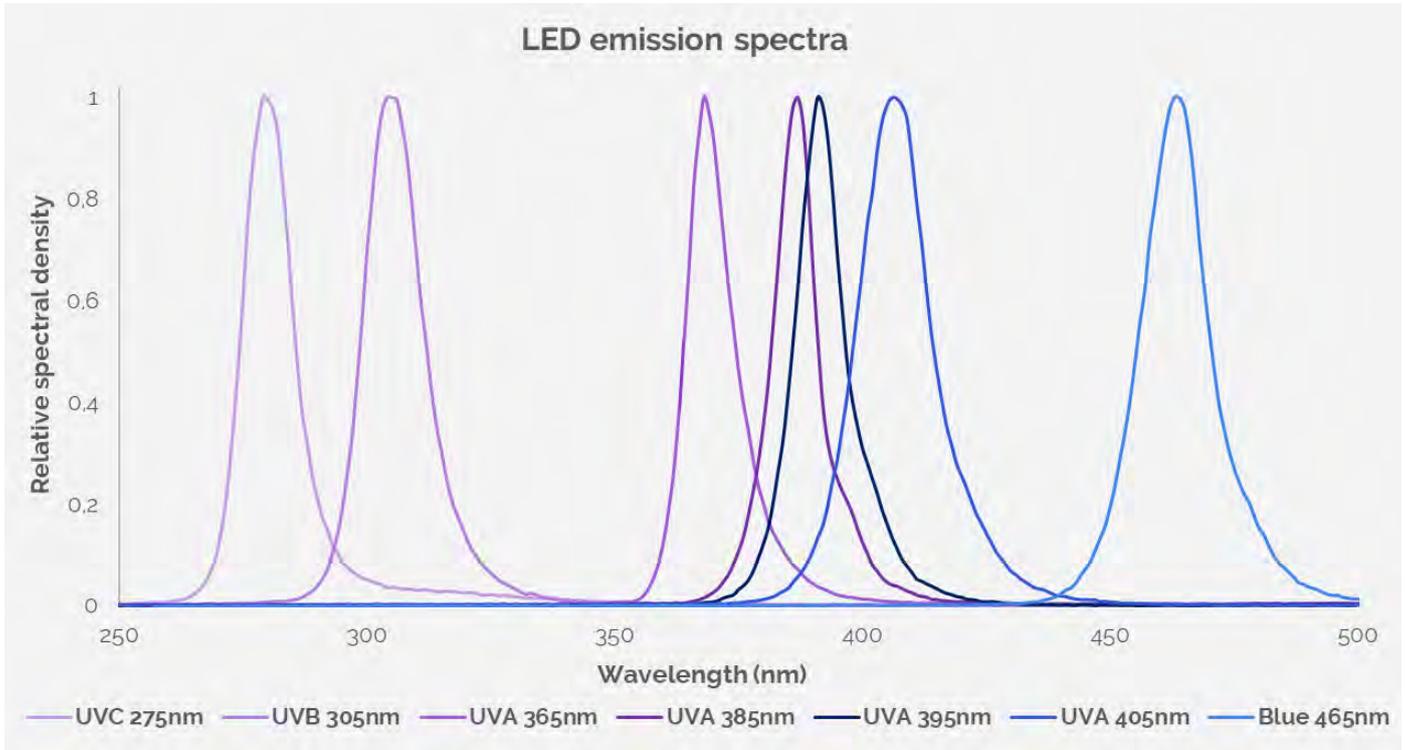

 For other wavelengths (UVC / UVB / UVA / VISIBLE / IR), feel free to ask us!


**Collimation optics option (-COL)**

The UCUBE-20-XXX has a dispersive UV illumination, but an optional collimation optical system (6° light beam) can be added to strongly increase irradiation uniformity.


- 1 Without COL option**
- 2 With COL option**



**Photometry**

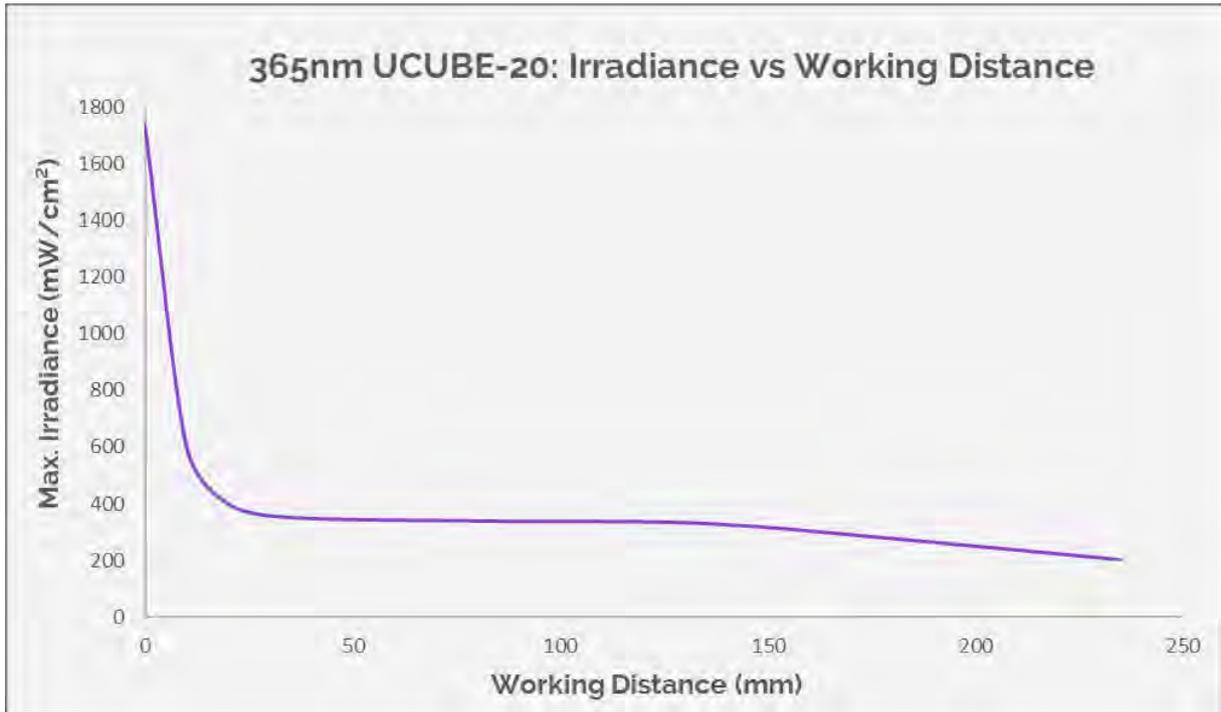

**Irradiation profile**

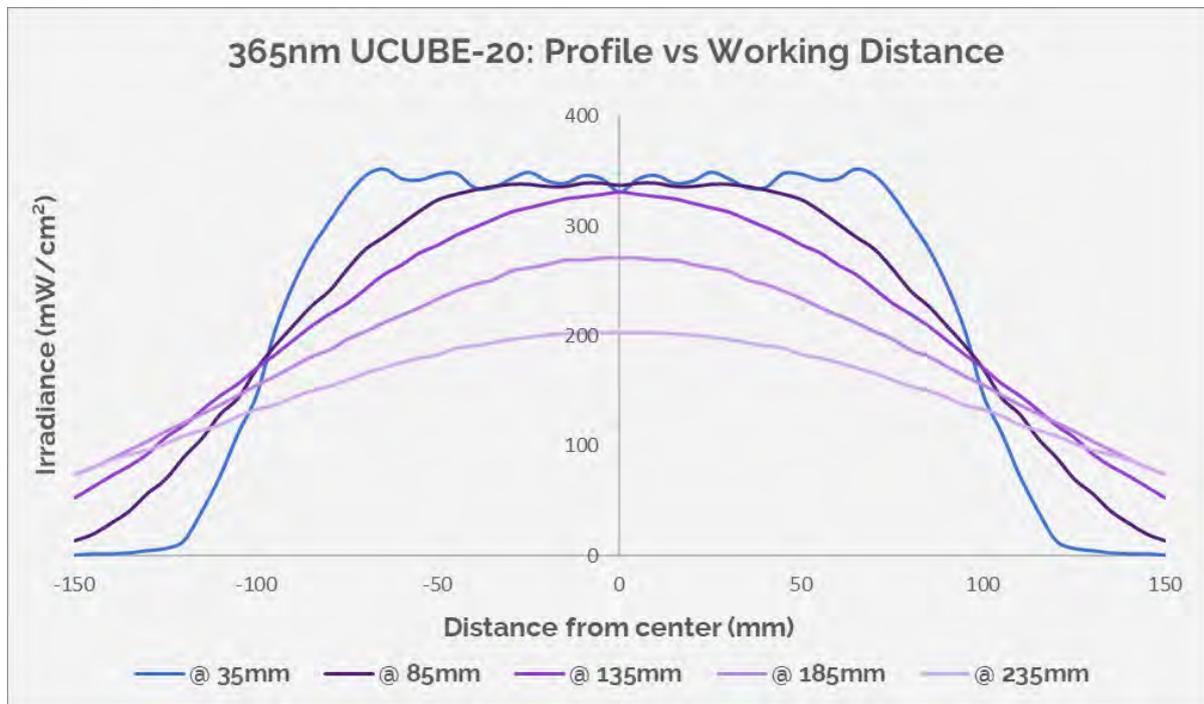


Curve plotted for UVA wavelength. For UVC & UVB irradiance, please divide the irradiance value by a factor of 40. Radiometer: GIGA HERTZ OPTIK RCH-116 (June 2023). For the UV spot graph, the spot size is the exposed area where the irradiance is higher than 50% of the maximum irradiance.




Mechanical dimensions

UCUBE-20 version:

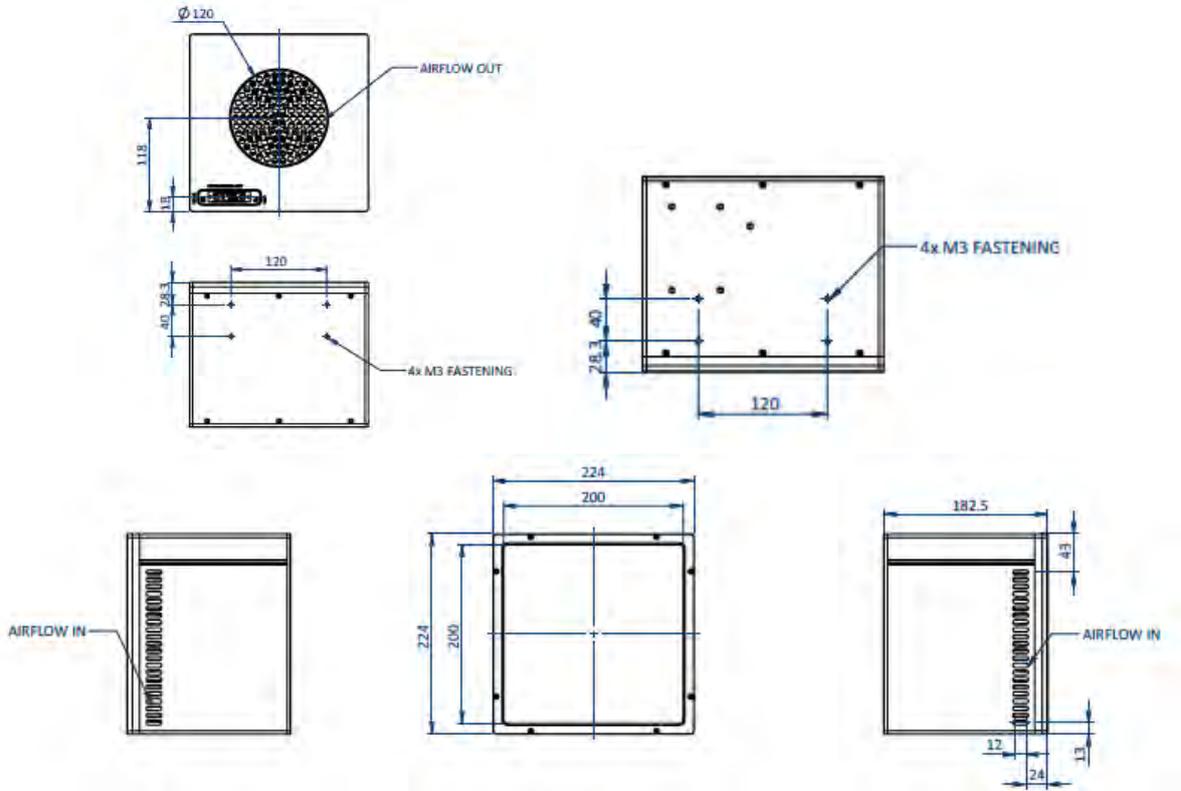

UCUBE-20 with WATER option:

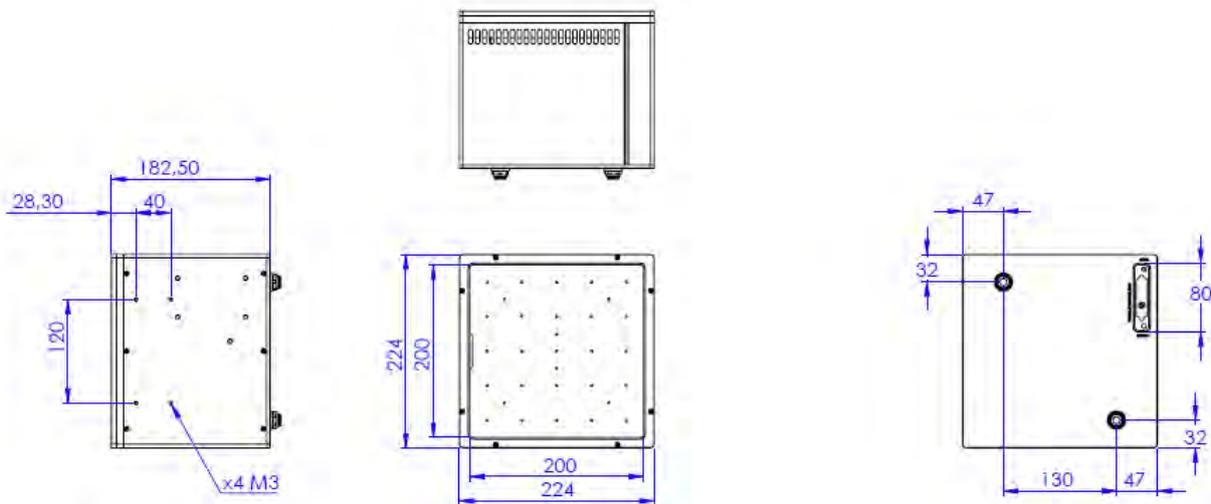




**Electronical considerations**

**Wiring layout**

The UCUBE requires 48V DC input power. It integrates smart electronical board to achieve stable optical power and exploitable output signals. The UCUBE can be managed with a control unit (UPOWER – please refer to accessories part of this datasheet) or without a control unit through PLC wiring.

Contact arrangement	Pin number	Cable color	Designation
 <p><b>Male D-SUB 13W3pins</b></p>	<b>A1</b>	<b>Brown</b>	<b>Power supply Input – 48V DC (8,3 A max)</b>
	<b>A2</b>	<b>Yellow &amp; Green</b>	<b>Protective ground</b>
	<b>A3</b>	<b>Blue</b>	<b>Power supply Input – 0V DC (GND)</b>
	1	White	Dimming Input – [0-10V] direct
	<b>2</b>	<b>Blue</b>	<b>COMMON_OUT – Allows dry contact with pin 3, 6 and 7. 40mA maximum per contact.</b>
	3	White	UV LED ON output – dry contact with pin 2 if device is currently emitting UV or opened if UV LED are off.
	<b>4</b>	<b>Blue</b>	<b>Enable + (dry contact with pin 5 to allow UV insolation)</b>
	5	White	Enable – (dry contact with pin 4 to allow UV insolation)
	<b>6</b>	<b>Blue</b>	<b>TEMPERATURE ERROR output – dry contact with pin 2 if device is overheating or opened if LED temperature is OK.</b>
	7	White	DRIVER ERROR output – dry contact with pin 2 if there is a driver issue is detected or opened if drivers are OK.
	<b>8</b>	<b>Blue</b>	<b>Power supply input – 0V DC (GND)</b>
<b>9 &amp; 10</b>	-	<b>Not used</b>	

**Intensity Control**

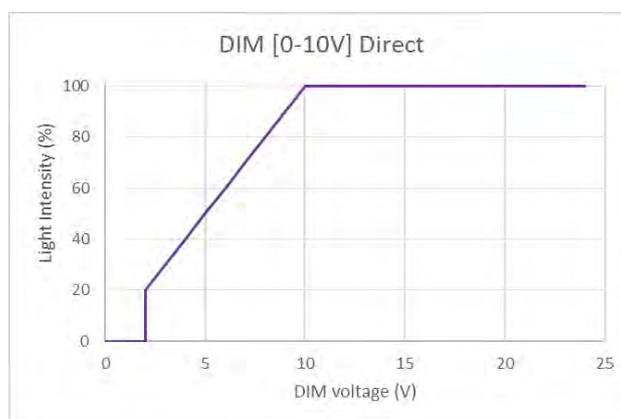

Other Dimming signals are available upon request: 0-24V indirect, 0-10V direct, 0-10V indirect, 0-5V direct or 0-5V indirect.



**Accessories**

<p><b>Cables</b></p> 	<p>One side with bare wire (towards PLC): <b>UCAB - SUBD - FD - 13W3 - D - L A</b></p> <p style="text-align: right;">   2 5 10 Cable length in meters         </p> <hr/> <p>Both sides connector (power supply link): <b>UCAB - SUBD - FM - 13W3 - DD - L A</b></p> <p style="text-align: right;">   2 5 10 Cable length in meters         </p>
<p><b>Advanced power supply</b></p>	<p>UPOWER-0600-48 for control of x1 UCUBE-20. UPOWER-1500-48-2SUBD for simultaneous control of x2 UCUBE-20.</p>  <p style="text-align: center;"><i>For other controlling configurations, please contact directly UWAVE team.</i></p>
<p><b>Easy-to-use oven with UCUBE-20 integrated on top</b></p>	<p>CHAMBER-20 to protect operators and to work in hidden time. A tray inside can be placed at different working distance from the UV light.</p>  <p style="text-align: center;"><i>For further information about CHAMBER-20, please refer to CHAMBER datasheet.</i></p>




**UV security**

UWAVE products come under the standard DIN EN 62471:2008 which classified sources of optical radiation into risk groups subject to their potential photo biological hazard. Due to the emission of high UV irradiation, our products belong to Risk Group 3 (hazardous even for momentary exposure) therefore special safety measures, detailed in the following, must be observed.



Thanks to its experience and knowledge about UV risks, UWAVE offers to its customer a wide range of UV protections & services:
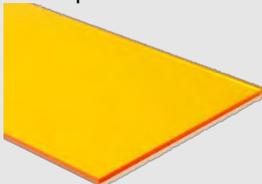
<p><b>Eyes protection</b></p>	<p>UGLASS-02: To protect eyes from direct rays.</p> 	<p>UGLASS-03: To cover all the face.</p> 	
<p><b>Body protection</b></p>	<p>UGLOVE-01: to protect hands.</p> 	<p>UV-SHIELD: To protect all workers around.</p> 	
<p><b>UV measurement</b></p>	<p>LEDCURE: UV values recording.</p> 	<p>URAD-PR: Direct UV value reading.</p> 	
<p><b>UWAVE expertise</b></p>	<p>EXPOSURE LIMIT VALUE</p>  <p>According to European Directive 2006/25/EC.</p>	<p>PERFORMANCES QUALIFICATION</p>  <p>Monitoring of all performances of your device.</p>	<p>MAINTENANCE &amp; REPAIR</p>  <p>Preventive maintenance on site &amp; LED repair service.</p>